



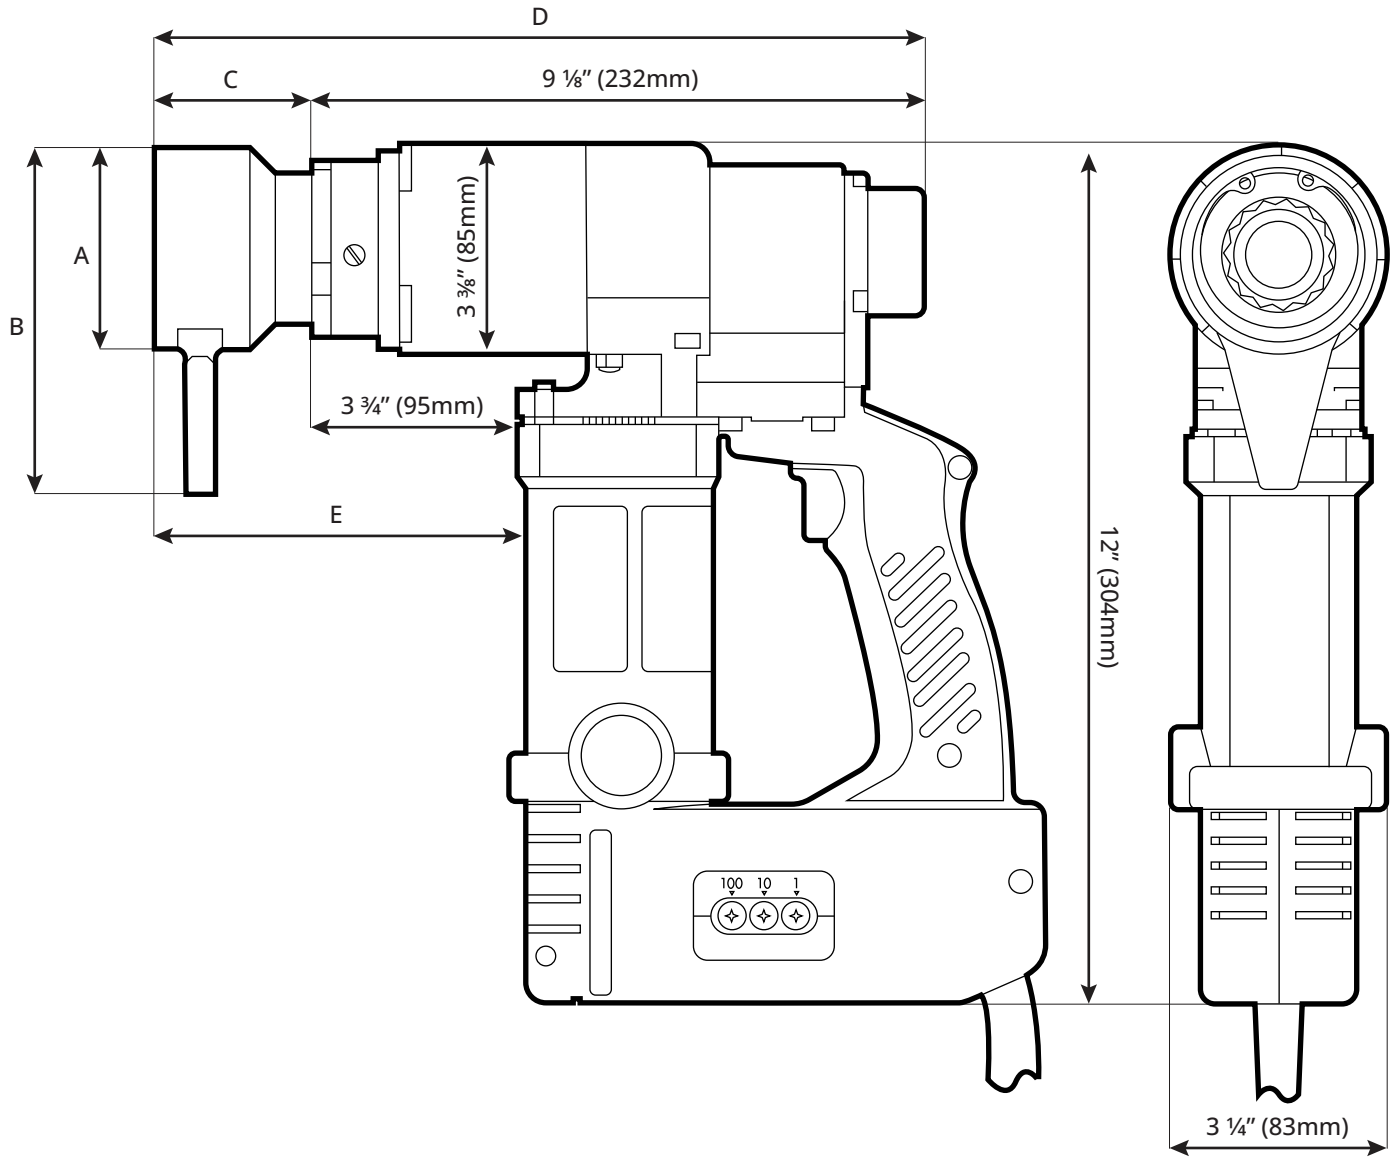

TN-24EZA Turn-of-Nut Wrench Dimensions w/ Bar Socket

Bar Socket	1 ¼"	1 7/16"	1 5/8"
Bolt Diameter	¾"	7/8"	1"
A	2.56" (65mm)	2.75" (70mm)	3.03" (77mm)
B	4.54" (115mm)	4.63" (117mm)	5.06" (129mm)
C	1.93" (49mm)	2.20" (56mm)	2.54" (64mm)
D	11.06" (281mm)	11.33" (288mm)	11.67" (296mm)
E	5.68" (144mm)	5.95" (151mm)	6.29" (160mm)

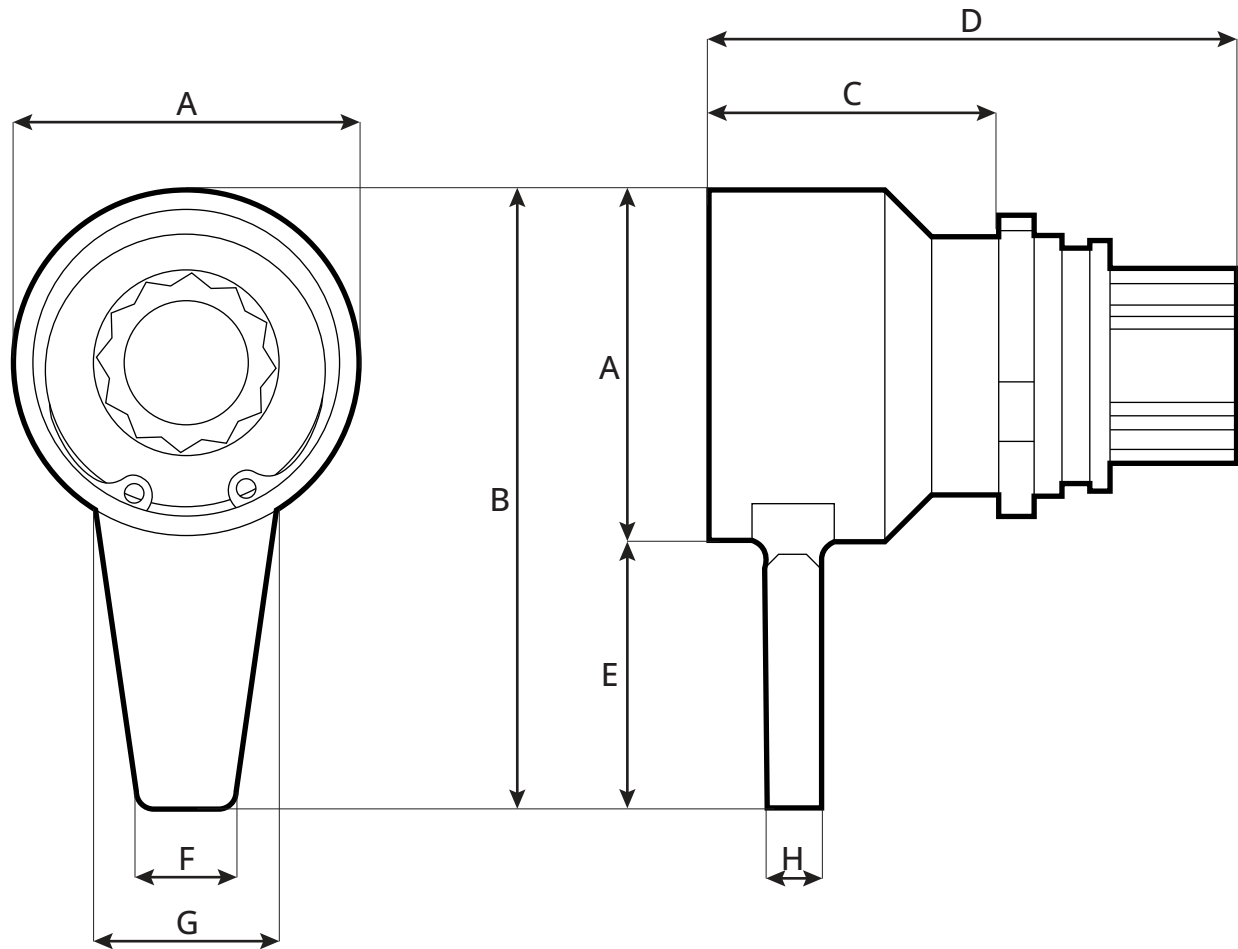

Bar Socket Dimensions for TN-24EZA Turn-of-Nut Wrench

Bar Socket	1 1/16"	1 1/4"	1 5/8"
Bolt Diameter	5/8"	3/4"	1"
A	2.56" (65mm)	2.75" (70mm)	3.03" (77mm)
B	4.54" (115mm)	4.63" (117mm)	5.06" (129mm)
C	1.93" (49mm)	2.20" (56mm)	2.54" (64mm)
D	3.73" (95mm)	3.98" (101mm)	4.33" (110mm)
E	1.98" (50mm)	1.88" (48mm)	2.03" (52mm)
F	0.55" (14mm)	0.55" (14mm)	0.55" (14mm)
G	1.31" (33mm)	1.25" (32mm)	1.61" (41mm)
H	0.36" (9mm)	0.36" (9mm)	0.34" (9mm)